

INSTALLATION INSTRUCTIONS

Product name DOGMASTER 2.0
Product type Dog safety harness
Item No. (S) 15400000, (M) 15400001, (L) 15400002, (XL) 15400003
Attachment To vehicle seatbelts only
Use Securing dogs in automobiles
Transport position On rear seats only
Version and features Size S, M, L, XL
Approved according to
ECE-R 17 at a weight of S=10 kg, M=14 kg, L=27 kg, XL=45 kg





kleinmetall GmbH
Hainstraße 52
63526 Erlensee
Telefon 06183.91120-0
Fax 06183.72152
E-Mail info@kleinmetall.de
www.kleinmetall.de

**! Please read these instructions carefully and keep them in a safe place.
Ensure your dog is properly secured before operating your vehicle!**

List of parts delivered:


1. Padded chest plate
2. Front belt
3. Rear belt
4. Grip
5. Fastener
6. Buckle
7. Holding strap
8. Leash rings

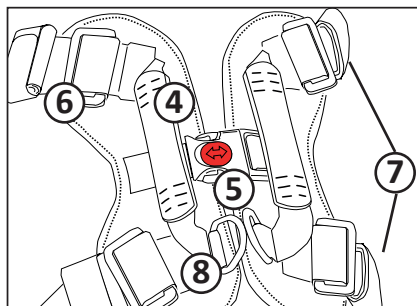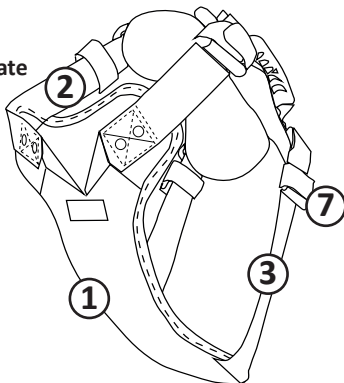



ATTENTION: The belts shall be tight, but still leave enough space to put approx. two fingers between animal and belt.

The leash rings shall be directed towards the dog tail.


Fastening the belt

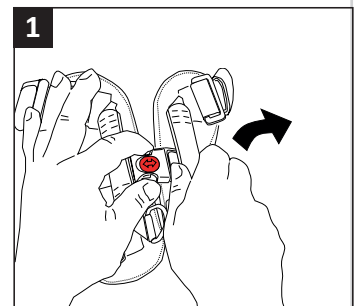

1. Open the fastener and unfold the belt with the logo showing downwards.

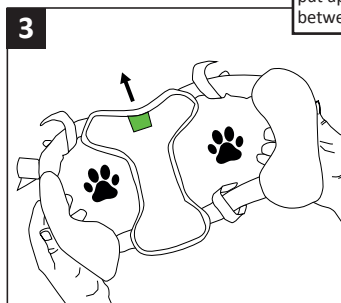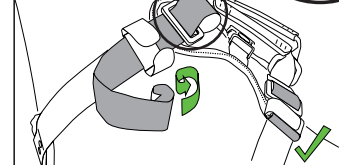

4. Close belt around the dog (leash rings shall be directed towards the dog tail). Evenly tighten the belts at the buckles. **ATTENTION:** The belts shall be tight, but still leave enough space to put approx. two fingers between animal and belt.

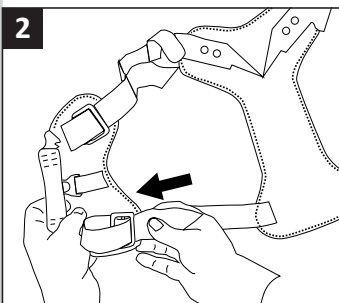


5. Lead the straps back correctly at all the buckles (see 1. and 2.). Roll up remaining strap and secure as closely as possible to the buckle with the holding strap.


2. Loosen all the straps at the buckles.

3. Insert the front legs of the dog in the belt openings so that the label shows to the front.

Secure pet in automobile

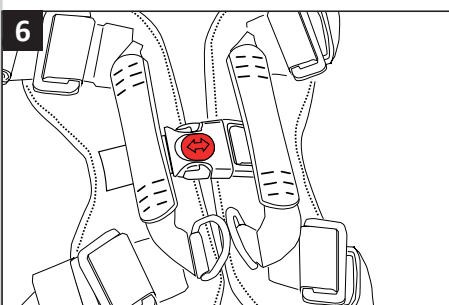


6. Lock fastener by moving the red safety button.
IMPORTANT: Always place the dog on the rear seats.

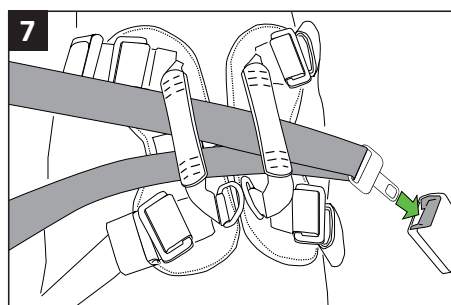

7. Place the dog on the rear seat and fasten the seatbelt. Lead safety belt through both grips and engage in belt lock.

Use as leash harness

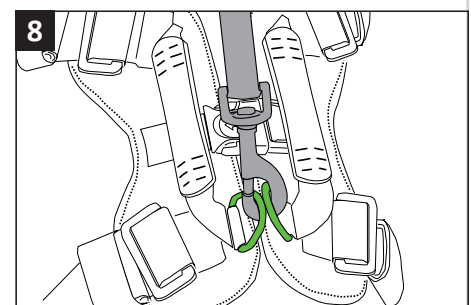

8. To walk the dog, attach carabiner of the dog leash to both leash rings.

Safety notice: Always transport your dog on the back seat of the vehicle and secure it properly – preferably behind the unoccupied front passenger seat! Should any huge strain have affected the belt system (e.g. in an accident), the system must be replaced.
Care and cleaning: Remove any accumulated dirt and hair, and use neutral soapy water to wash the fasteners and harness occasionally.
Important notice: Regularly inspect your DOGMASTER 2.0 dog safety harness (visually) for damage or wear and tear, and replace if necessary!